




# “T300A” Series, 100 K, ECL

## High Reliability Hybrid Microcircuit Crystal Oscillators


### Features

- Ruggedized Crystal Mount
- Radiation Tolerant to 10K Rads
- 100% Screening Options
- Low Phase Noise
- Hermetically Sealed Metal Package
- ECCN: EAR99

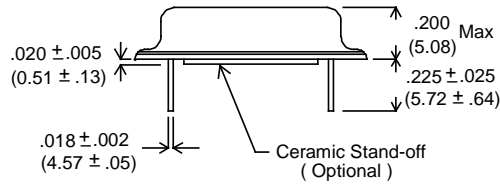

### Applications

- High Shock & Vibration Applications
- Navigation Systems
- Aerospace Instrumentation
- Benign Space Applications
- Gun Launched Munitions

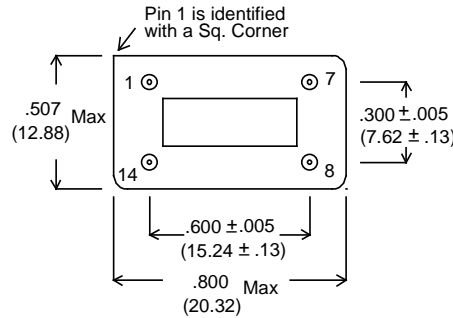

| PIN # | FUNCTION  |
|-------|-----------|
| 14    | GND/CASE  |
| 7     | - 4.5 VDC |
| 8     | OUTPUT    |
| 1     | N/C       |

### Package Specifications & Outline:

- Header & Leads Material: Kovar
- Cover Material: Nickel
- Seal: Hermetic – Resistance Welded
- Weight: 4.0 Gms typical, 5.0 Gms Max.
- Thermal Resistance, Junction to Case ( $\theta_{JC}$ ): 22 °C / Watt
- Lead Soldering, Temp./Time: 260 °C, 10 Secs. Max.
- Header Finish: 100 to 250  $\mu$  inches nickel
- Lead Finish: 50 to 80  $\mu$  inches gold over 100 to 250  $\mu$  inches nickel


Dimensions: Inches (mm)

Hot Solder Tinning per MIL-PRF-55310 is optional at additional cost.

Contact Xsis Electronics at [xisis@xisis.com](mailto:xisis@xisis.com) for any special requirements.

## ORDERING INFORMATION ( Please build your part number from options below ) :

**P/N EXAMPLE: T343A – 883B – 60.000 MHz = 100 K ECL, ± 50 PPM over -55 °C to +125 °C, 883B Screening, 60.000 MHz**

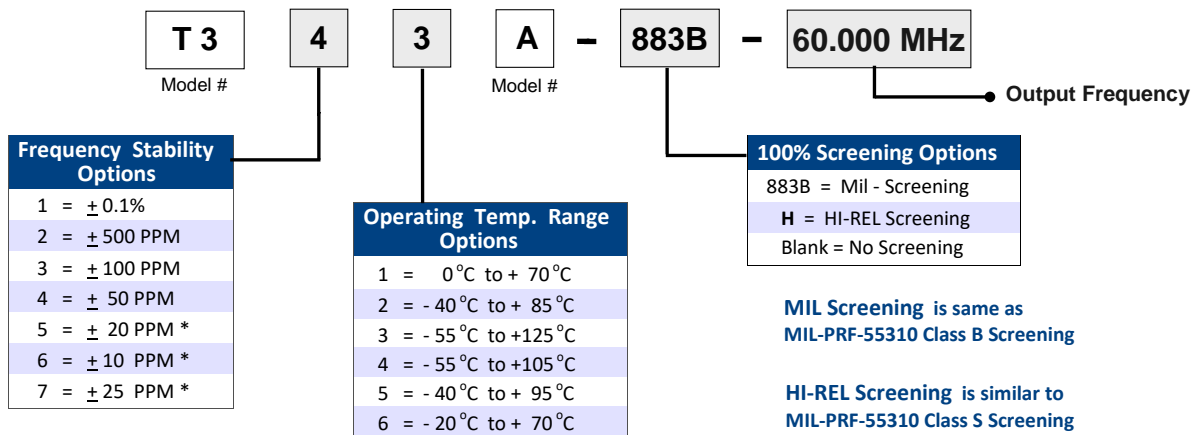

\* Frequency Stability Options 5, 6 & 7 are not available for all operating temperature ranges.



**“T300A” Series, 100 K, ECL**  
**High Reliability Hybrid Microcircuit Crystal Oscillators**

**Electrical Specifications:**

| Parameter                                   | Specification Limits                                      |
|---|---|
| Output Frequency Range                      | 10 MHz - 220 MHz  |
| Frequency Accuracy at +25 °C                | ± 15 PPM  |
| Frequency Stability Vs Temperature          | See Ordering Information on Page 1                        |
| Operating Temperature Range                 | See Ordering Information on Page 1                        |
| Supply Voltage (Vdd)                        | - 4.5 VDC ± 10%   |
| Input Current (no Load )                    | 50 mA Max   |
| Output Waveform                             | Square Wave, 100K ECL Compatible                          |
| Output Duty Cycle ( at 50% Output Level )   | 60/40% Max.   |
| Output High Level                           | 100K ECL Compatible                                       |
| Output Low Level                            | 100K ECL Compatible                                       |
| Output Load                                 | 100 Ω to - 2.0 VDC  |
| Rise & Fall Times ( Typical Load )          | 2 nS Max.   |
| Start-Up Time                               | 10 mS Max.  |
| Phase Jitter ( 10 KHz - 20 MHz Integrated ) | 0.10 pS rms Typical                                       |
| Freq. Stability Vs Supply Voltage           | ± 4 PPM Max. for ± 10% change in Supply Voltage           |
| Aging at 70 °C                              | ± 3 PPM Max. first year, ± 2 PPM Max. per year thereafter |
| Absolute Maximum Applied Voltage            | + 7 VDC   |
| Storage Temperature                         | -65 °C to +125 °C   |

NOTE: For PECL applications, Xsis 300A Series oscillators can be operated with +5 VDC ± 10% on Pin 14 and power supply return on Pin 7. Output signal can be AC or DC coupled.

***For special requirements, such as, tighter output symmetry, faster start-up time, PIND screening, etc., please contact Xsis Electronics at [xisis@xisis.com](mailto:xisis@xisis.com) or call us at 913-631-0448.***



**“T300A” Series, 100 K, ECL**  
**High Reliability Hybrid Microcircuit Crystal Oscillators**

**Packaging:** ESD protective conductive foam tray.

**Thermal Characteristics:**

Junction to case Thermal Constant (  $\theta_{JC}$  ): 22 °C / Watt

Junction to Ambient ( Device floating in free air) Thermal Constant (  $\theta_{JA}$  ): 85 °C / Watt

**Hi-Rel Screening:**

When HI-REL option is selected, Xsis Oscillators are subjected to 100% screening similar to Class “S” screening in accordance with MIL-PRF-55310. Refer to [www.xsis.com](http://www.xsis.com) for additional details about HI-REL screening.

**Typical Phase Noise (dbc/Hz):**

| Output Frequency | 10 Hz | 100 Hz | 1 KHz | 10 KHz | 100 KHz | 1 MHz |
|------------------|-------|--------|-------|--------|---------|-------|
| 10 MHz           | -109  | -140   | -157  | -162   | -163    | -164  |
| 25 MHz           | -100  | -127   | -151  | -158   | -160    | -162  |
| 50 MHz           | -89   | -117   | -148  | -157   | -159    | -160  |
| 96 MHz           | -80   | -107   | -139  | -151   | -156    | -158  |
| 100 MHz          | -77   | -104   | -133  | -145   | -151    | -155  |

**Environmental Specifications:**

T300A series oscillators are designed to meet or exceed the Environmental tests specified below. Customized screening and environmental testing are also available to meet your special requirements.


| Test                         | Test Conditions   |
|------------------------------|---|
| Vibration                    | 0.06” DA, 30 G peak, 10 - 2000 Hz, MIL-STD-202, Method 204, Cond. G |
| Shock                        | 1500 G, 0.5 mS, half-Sine, MIL-STD-883, Method 2002, Cond. B        |
| Temperature Cycling          | MIL-STD-883, Method 1010, Cond. C                                   |
| Thermal Shock                | MIL-STD-202, Method 107, Cond. B                                    |
| Seal ( Fine and Gross )      | MIL-STD-883, Method 1014 Cond. A & C                                |
| Burn-in                      | 160 Hours, 125 °C, Nominal Supply Voltage & Load                    |
| Frequency Aging              | 30 days at 70 °C, ± 1.5 PPM Max.                                    |
| Altitude                     | MIL-STD-202, Method 105, Cond. C                                    |
| Constant Acceleration        | MIL-STD-883, Method 2001, 5000 G                                    |
| Moisture Resistance          | MIL-STD-202, Method 106, Vibration Sub Cycle Omitted                |
| Solderability                | MIL-STD-202, Method 208   |
| Resistance to Soldering Heat | MIL-STD-202, Method 210, Cond B. or C as applicable                 |
| Resistance to Solvents       | MIL-STD-202, Method 215   |
| Internal Water Vapor Content | MIL-STD-883, Method 1018  |
| ESD Classification           | MIL-STD-883, Method 3015, Class 1C, HBM 1000 to 1999                |
| Moisture Sensitivity Level   | J-STD-020, MSL=1  |



# “T300A” Series, 100 K, ECL


## High Reliability Hybrid Microcircuit Crystal Oscillators

### ECL Test Circuit

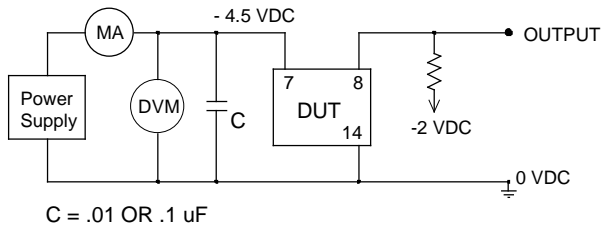

NOTE: For PECL applications, Xsis 300 Series oscillators can be operated with +5 VDC  $\pm$  10% on Pin 14 and power supply return on Pin 7. Output signal can be AC or DC coupled.

### ECL Output Waveform

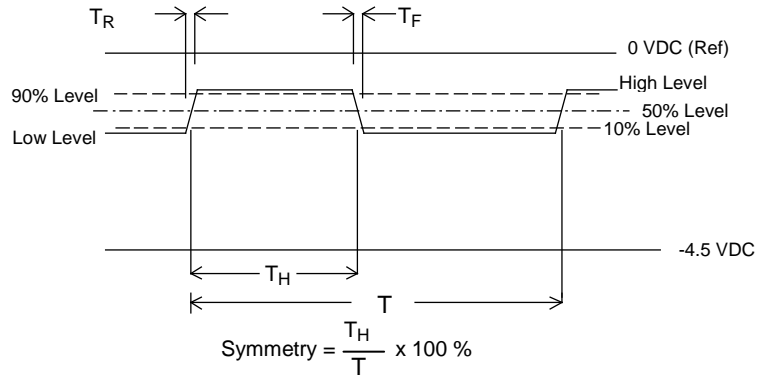

### Typical Freq. Stability Vs. Temperature

