

## Description

Xsis Electronics "XHJ4x" Series High Temperature 32.768 KHz, Real Time Clock oscillators are designed and processed to operate over an extended temperature range of -55°C to 200°C. These oscillators are offered in a low profile, hermetically sealed resistance welded 7x9mm ceramic package.

High temperature materials and proven processes are utilized to provide high reliability and long life at extreme temperatures.

In addition, the quartz crystal is mounted at four points to provide excellent shock and vibration resistance.

## Features

- Crystal Mounted at 4 Points
- Ultra Low Current ( 120 uA Max. at 3.3V )
- > 20KG ( 0.3 mS) Shock Resistance
- 1.8V, 2.5V, & 3.3V operation options
- 100% testing over operating temperature range
- Tristate Output Option
- Low Phase Noise
- Hermetically Sealed, Ceramic Package
- Tape & Reel packaging
- Made in USA. ECCN: EAR99


## Applications

- Downhole Drilling Operations
- High Shock & Vibration
- High Temperature Avionics
- Gun Launched Munitions
- Jet Engine Sensors

## Package Specifications & Outline:

- Package: Ceramic 90% AL<sub>2</sub>O<sub>3</sub>
- Seal: Hermetic – Resistance Welded
- Weight: 0.5g typical, 0.8g Max.
- Thermal Resistance, Junction to Case (  $\theta_{JC}$  ): 38 °C / Watt
- Solder Reflow, Temp./Time: 260 °C Max for 10 Seconds Max.
- Pad Finish: 1.27 to 2.2  $\mu$ m gold over 1.27 to 8.9  $\mu$ m nickel
- Lead Material & Finish: Kovar, 40 to 70  $\mu$  inches gold over 100 to 250  $\mu$  inches Nickel


Contact Xsis Electronics at [xisis@xisis.com](mailto:xisis@xisis.com) for any special requirements.

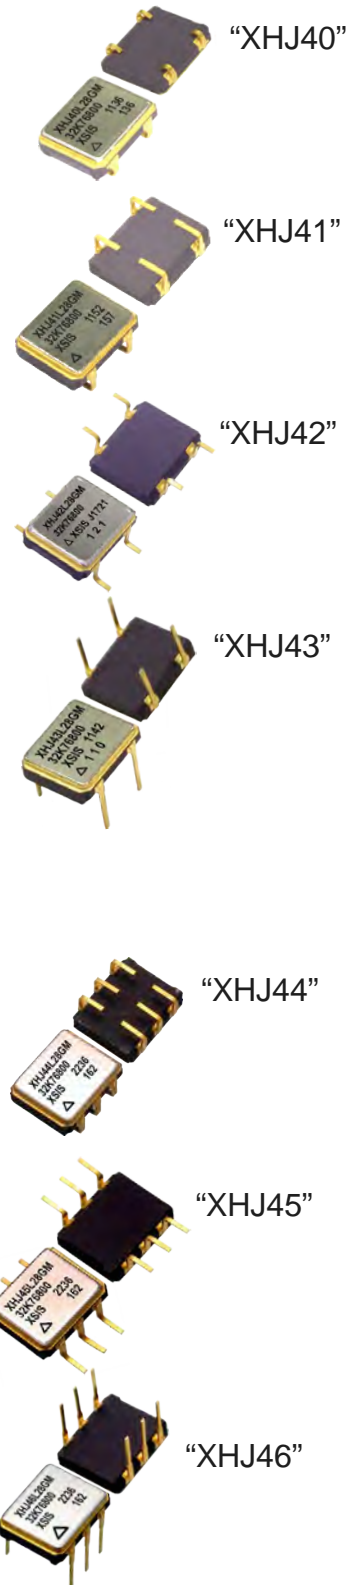



**ORDERING INFORMATION ( Please build your part number from options below ) :**

**P/N EXAMPLE: XHJ40 L 28GM - 32.768 KHz** = 3.3 V LVHCMOS, ± 150 PPM Frequency Accuracy over -55 °C to +180 °C, Tristate Output, 100% Screening, 32.768 KHz

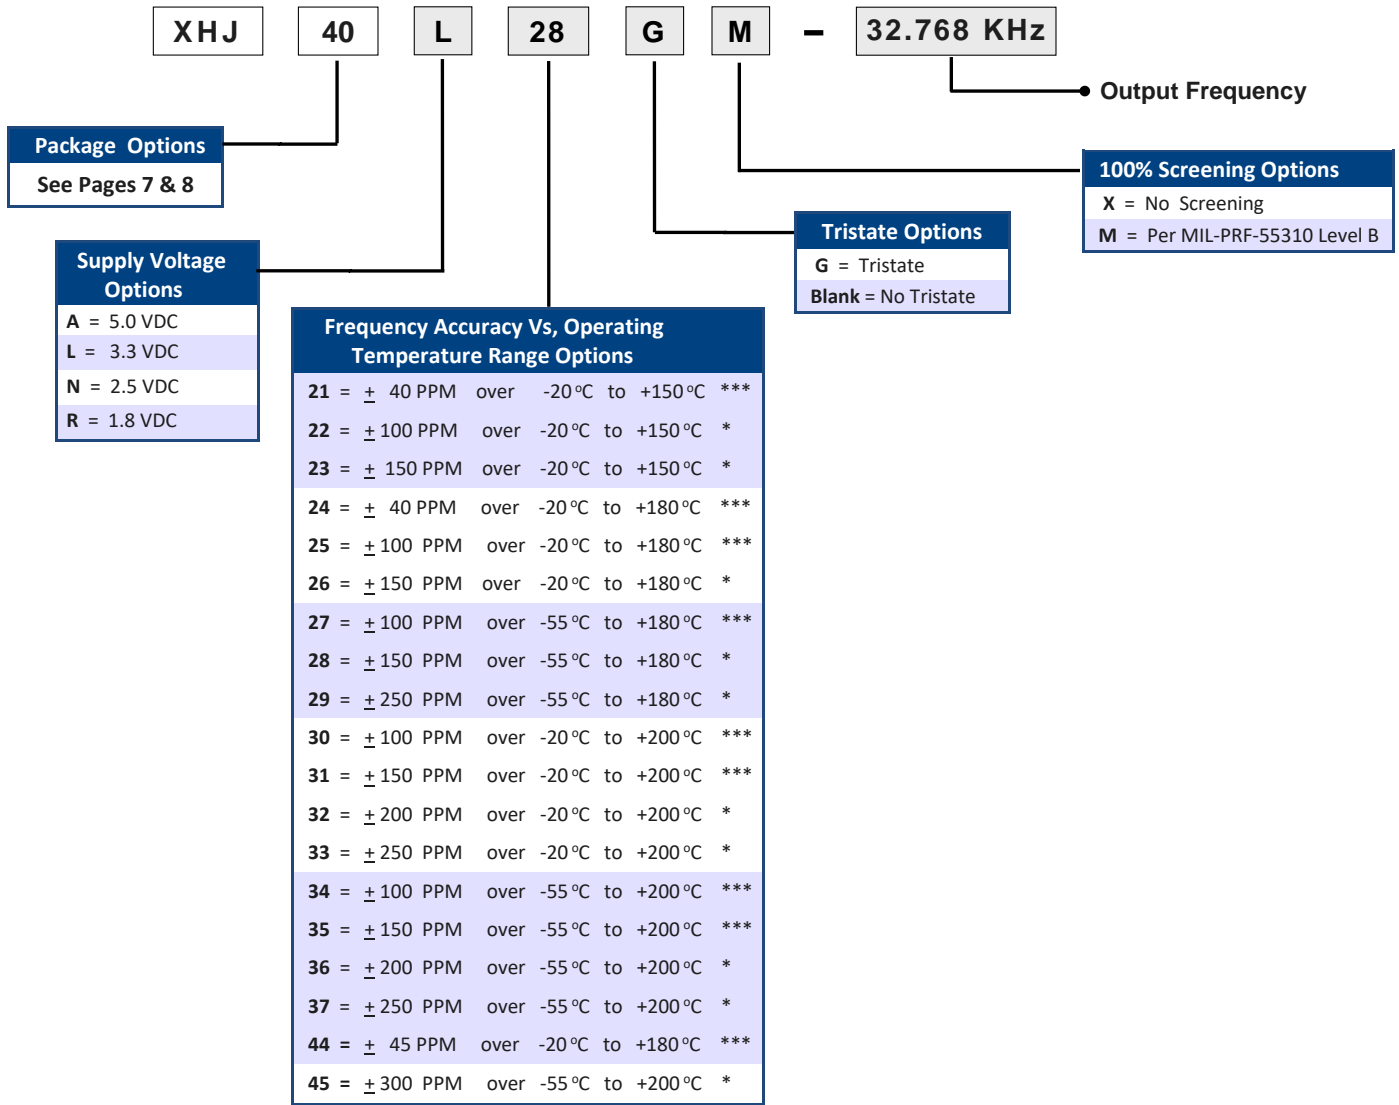

\*\*\* Tight Stability      \* Standard Stability

**Contact Xsis Electronics at [xisis@xisis.com](mailto:xisis@xisis.com) (913-631-0448) for any special requirements.**

## Electrical Specifications

Parameter	1.7 VDC to 3.8 VDC
Output Frequency	32.768 KHz
Frequency Stability Vs Temperature	See Ordering Information on Page 2
Operating Temperature Range	See Ordering Information on Page 2
Supply Voltage (Vdd)	1.7 to 3.8 VDC
Input Current (no Load )	40 $\mu$ A Max. ( < 10 $\mu$ A in disabled state )
Output Waveform	Square Wave
Output Duty Cycle ( at 50% Output Level )	50/50% Typical, 48/52% Max.
Output High Level	0.9 Vdd Min.
Output Low Level	0.1 Vdd Max.
Output Load	10K // 15 pF
Rise & Fall Times ( Typical Load )	50 nS Typical, 0.2 $\mu$ s Max. ( 10% to 90% Output Levels)
Enable/Disable ( E/D)	E/D Input $\geq$ 0.7 Vdd or Open : Normal Output E/D Input $\leq$ 0.3Vdd: High Impedance
Start-Up Time	15 mS Max.
Aging at 70 °C	$\pm$ 3 PPM Max. first year, $\pm$ 2 PPM Max. per year thereafter
Absolute Maximum Applied Voltage	+ 5VDC
Storage Temperature	-65 °C to +125 °C

***For special requirements, such as, tighter output symmetry, faster start-up time, PIND screening, etc., please contact Xsis Electronics at [xisis@xisis.com](mailto:xisis@xisis.com) or call us at 913-631-0448.***



**Packaging Options:**

Standard Packaging in ESD foam trays

Tape & Reel, EIA-481-A Compliant is available at additional cost

**Thermal Characteristics:**


Junction to case Thermal Constant (  $\theta_{JC}$  ): 38 °C / Watt

**Environmental Specifications:**

XHJ4x series oscillators are designed to meet or exceed the Environmental tests specified below. Customized screening and environmental testing are also available to meet your special requirements.


Test	Test Conditions
Vibration	0.06" DA, 30 G peak, 10 - 2000 Hz, MIL-STD-202, Method 204, Cond. G
Shock	5000 G, 0.3 mS, half-Sine, MIL-STD-883, Method 2002, Cond. D
Temperature Cycling	MIL-STD-883, Method 1010, Cond. C
Thermal Shock	MIL-STD-202, Method 107, Cond. B
Seal ( Fine and Gross )	MIL-STD-883, Method 1014 Cond. A & C
Burn-in	160 Hours, 125 °C, Nominal Supply Voltage & Load
Frequency Aging	30 days at 70 °C, $\pm$ 1.5 PPM Max.
Altitude	MIL-STD-202, Method 105, Cond. C
Constant Acceleration	MIL-STD-883, Method 2001, 5000 G
Moisture Resistance	MIL-STD-202, Method 106, Vibration Sub Cycle Omitted
Solderability	MIL-STD-202, Method 208
Resistance to Soldering Heat	MIL-STD-202, Method 210, Cond B. or C as applicable
Resistance to Solvents	MIL-STD-202, Method 215
Internal Water Vapor Content	MIL-STD-883, Method 1018
ESD Classification	MIL-STD-883, Method 3015, Class 1C, HBM 1000 to 1999
Moisture Sensitivity Level	J-STD-020, MSL=1

### HCMOS Test Circuit

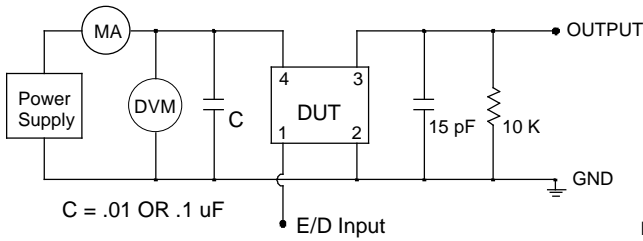


E/D ( Enable/Disable ) Input has an internal pull-up resistor. It can be left floating or connected to Vdd.

### HCMOS Output Waveform





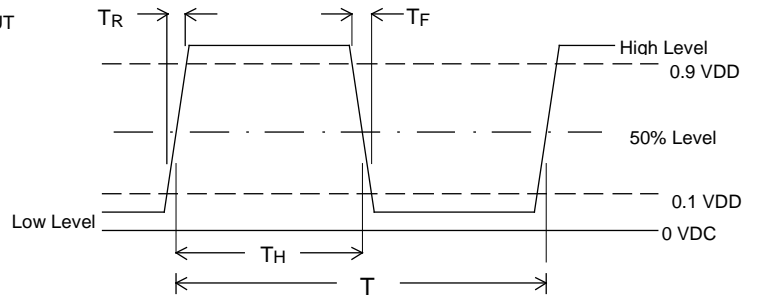


$$\text{Symmetry} = \frac{T_H}{T} \times 100 \%$$


### Typical Freq. Stability Vs. Temperature

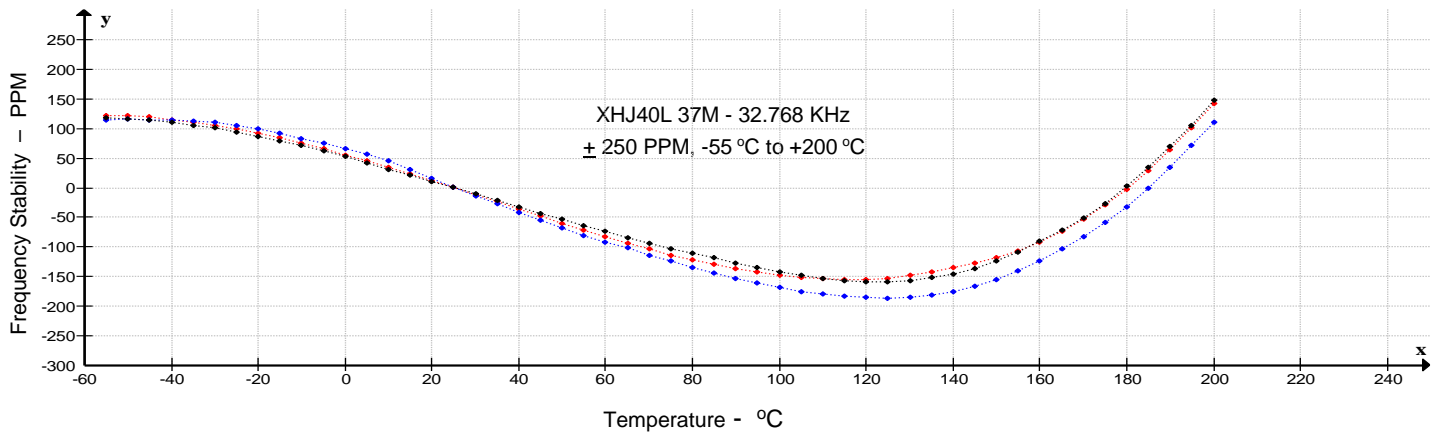

**Package Outline and Pin Connections – Dimensions are in inches (mm)**




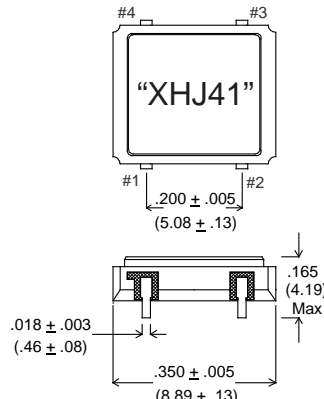

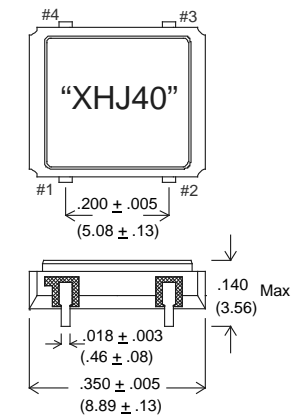


LEAD#	FUNCTION
1	E/D (Optional)
2	GND/CASE
3	OUTPUT
4	VDD





**E/D ( Enable/Disable ) Input:** A "Low" level at the input disables the Output into a high impedance state.

E/D Input has internal pull-up. It can be left floating or connected to Vdd.

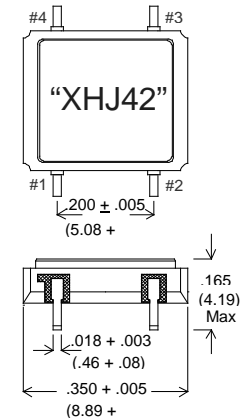

**Package Outline and Pin Connections – Dimensions are in inches (mm)**

LEAD #	FUNCTION
1	E/D (Optional)
2	N/C
3	GND/CASE
4	OUTPUT
5	N/C
6	VDD

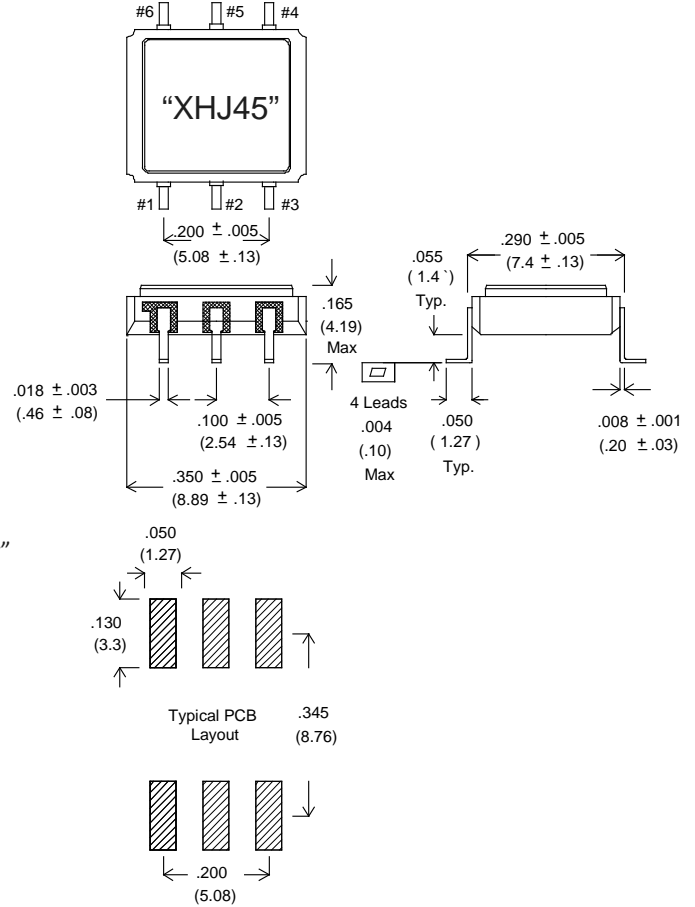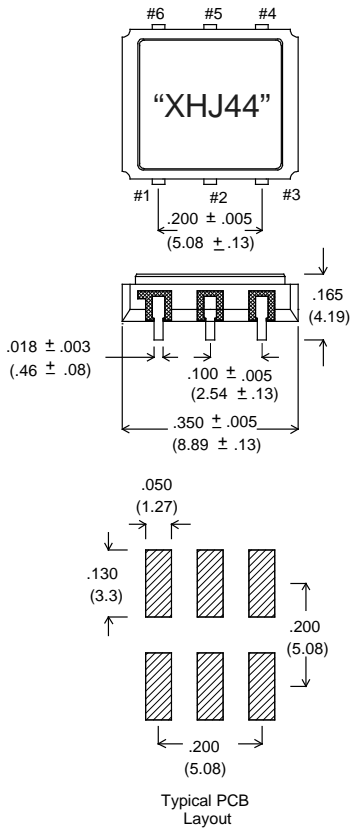

**E/D ( Enable/Disable ) Input:** A "Low" level at the input disables the Output into a high impedance state.  
 E/D Input has internal pull-up. It can be left floating or connected to Vdd.

