

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR69/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and [MIL-PRF-3098](#).

Pertinent characteristics: 2.9 MHz to 25 MHz; fundamental; noncontrolled; anti-resonance.

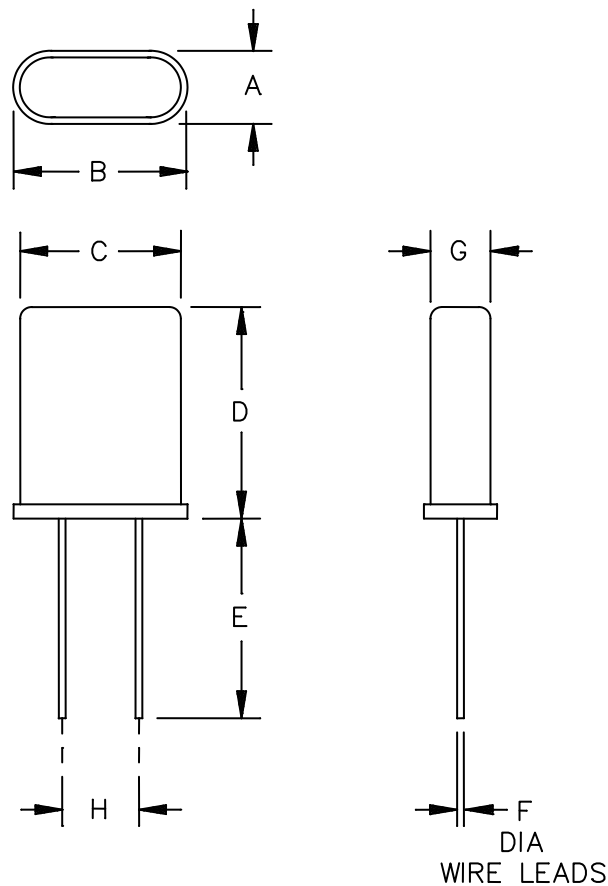


FIGURE 1. Crystal unit - CR69/U.

MIL-PRF-3098/47K

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	.183	---	4.65
B	---	.435	---	11.05
C	---	.402	---	10.21
D	---	.530	---	13.46
E	.500	---	12.70	---
F	.016	.019	0.41	0.48
G	---	.150	---	3.81
H	.184	.200	4.67	5.08

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with [MIL-PRF-3098](#).

FIGURE 1. Crystal unit - CR69/U - Continued.

MIL-PRF-3098/47K

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 2.9 MHz to 25 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerances:

Primary operating temperature range: ± 20 parts per million (ppm).

Secondary operating temperature range: ± 30 ppm.

Equivalent resistance: See table I.

Mode of oscillation: Fundamental.

Antiresonance, load capacitance: 30.0 pF ± 0.5 pF.

Operating temperature ranges (noncontrolled):

Primary: -40°C to $+90^{\circ}\text{C}$, inclusive.

Secondary: -55°C to -40°C , and $+90^{\circ}\text{C}$ to $+105^{\circ}\text{C}$, inclusive.

Rated drive level: 1.0 mW, maximum.

Shock:

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

Vibration: [Method 204, MIL-STD-202](#), test condition A.

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

Thermal shock:

Frequency change permitted: ± 5 ppm.

Equivalent resistance change permitted: ± 10 percent.

Aging:

Frequency change permitted: ± 5 ppm.

MIL-PRF-3098/47K

TABLE I. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
<u>MHz</u>	<u>Ohms</u>
2.90 to 3.75	180
3.75+ to 4.75	120
4.75+ to 6.00	75
6.00+ to 7.00	50
7.00+ to 10.00	30
10.00+ to 25.00	25

Part or Identifying Number (PIN): CR69/U (followed by specified frequency), see 1.2 of [MIL-PRF-3098](#).

Referenced documents. In addition to [MIL-PRF-3098](#), this document references the following:

[MIL-STD-202](#).

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - CR
Navy - EC
Air force - 99
DLA - CC

Preparing activity:

Army - CR

Agent:

DLA - CC

Review activities:

Army - AR, MI, SM
Navy - AS, CG, MC, OS, SH
Air Force - 19, 84

(Project 5955-2009-058)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil>.